

B

APPLICATION

1808 adapts the zooming technology of SLR cameras, Beams selection from 10 to 60 degrees can be made on site as per project demand. Sleek design available in 2.7" 3.5" & 4.3" dia with 15W 30W & 40W respectively. This Sleek Track Lighting Model is ideal for Shopping malls, Condominiums suites. It is a high performance, easy to install Track Lighting solution.



SPECIFICATION FEATURES

Design	Aluminum body with PMMA diffuser lens for low glare.
Mounting	Track Mounted (Track can be surface or Suspended.
Environment	Suitable for wet locations.
LED	15W 30W & 40W with 90-100 Lm/W , CRI of 80/90. Available in 2700K, 3000K, 4000K or 5000K CCT.
LED Driver	Integrated dimmable class II electronic LED driver with Universal 120V/220V AC 50/60 Hz.


PHOTOMETRY

TABULATION & ORDERING NUMBER LOGIC

Model	TYPE	Size	Mounting	Watt	Lumens	Input Voltage	CRI	CCT	Finish	Dimming
1808	2W - 2 Wire	2.7- 2.7"	S - Surface	15 - 15W	13.5L - 1350Lm	UNV - 120V/ 227V	80 - 80 RA	30 - 3000K	WT - White	D - 0-10V
	3W - 3 Wire	3.5 - 3.5"	P - Pendant	30 - 30W	27L - 2700Lm					
	4W - 4 Wire	4.3 - 4.3"		40 - 40W	36L - 3600Lm					
							90 - 90 RA	40 - 4000K	BK - Black	T - Triac
								50 - 5000K	GR - Grey	

B

Accessories




2 Wire Tracking System



LE



FLX




3 Wire Tracking System



TC



SC



4 Wire Tracking System




LC



XC

- 8' Track
- 4' Track
- LE- Live End Connector
- FLX - Flexible Connector
- TC- T Connector
- SC - Straight Connector
- LC - L Connector
- XC - X Connector

ORDERING EXAMPLE: 1808-3W-2.7-S-15-13.5L-UNV-80-27-WT-D

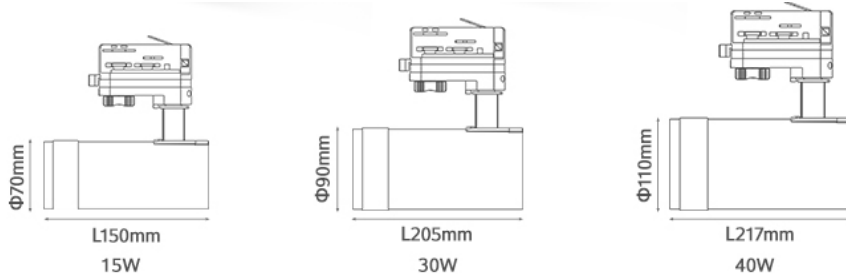

MODEL	DIA Ø	LENGTH H
1808-15W	70mm / 2.7"	150mm / 5.9"
1808-30W	90mm / 3.5"	205mm / 8"
1808-40W	110mm / 4.3"	217mm / 8.6"