



A

APPLICATION

Lede Lighting DL254 Downlight is compact design with 2835 SMD chip covered by high transmittance PC cover which provides a uniform low glare light output. Housing offers great thermal resistance. Ideal for retrofits and New construction installations. Comes with standard 3 CCT and 3 Power tunable.

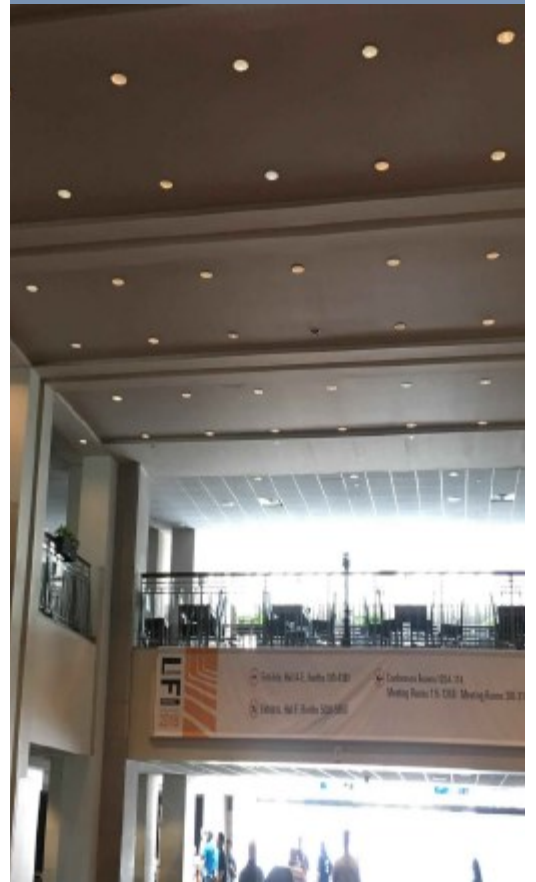

PHOTOMETRY

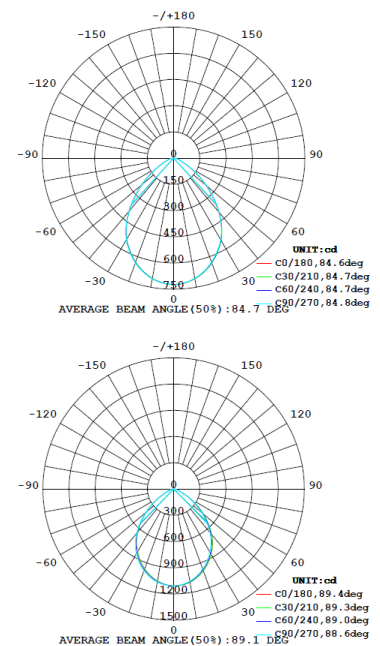

SPECIFICATION FEATURES

<b>Design</b>	Aluminum , PC
<b>Mounting</b>	Recessed, optional with New Construction hanger bars.
<b>Environment</b>	Wet Location, IC and air tight rated.
<b>LED</b>	2835 SMD chip, High Lumen efficiency 100 LPW , 3 CCT adjustable 3000 K +4000K+5000K with 3 Power adjustable power option 4" ( 6W-8W-12W), 6" ( 8W-12W-16W), for 8" ( 12W-16W-22W)
<b>LED Driver</b>	Integrated built-in flicker free driver, 0-10V Dimming
<b>Emergency Pack</b>	Optional UL listed Emergency Driver.

**TABULATION & ORDERING NUMBER LOGIC**

Model	Size	Lumens @ CRI 80	Dimming	Power tunable	CCT tunable	Input Voltage	Optics	CRI	Trim Finish	Accessories
DL254	4 - 4"	6 - 6W (540LM)	O - 0-10V	A - Power Tunable	C3 - CCT Tunable	UNV - 120V/227V	80 - 80°	80 - 80 RA	WT - White	EM - Emergency pack
	6 - 6"	8 - 8W (700LM)		4" (6W-8W-12W)	30 - 3000K 35 - 3500K		90 - 90°	90 - 90 RA		HD- Hanger bars
	8 - 8"	12 - 12W (1000LM)		6" (8W-12W-16W)	40 - 4000K					
		16 - 16W (1320LM)		8" (12W-16W-22W)						
		22 - 22W (2160LM)								


**A**

**ORDERING EXAMPLE:**


4" (DL254-4-8-OAC3)

6" (DL254-6-16-OAC3)



8" (DL254-8-22-OAC3)




**Hanger bar**






**HD-6**

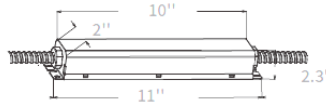

**Emergency Driver**



**HD-8**

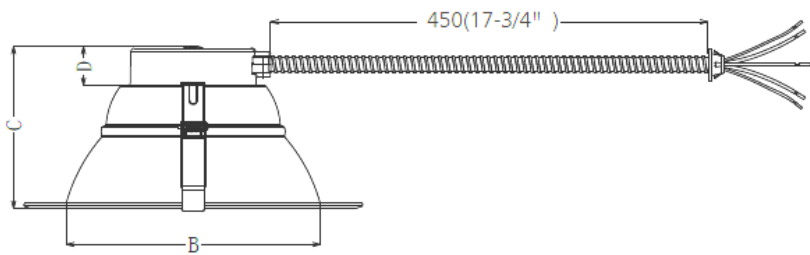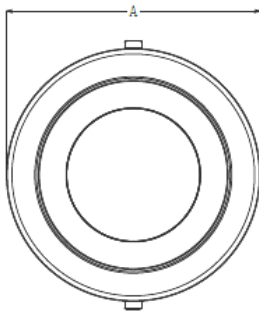

MODEL	A	C	D	CUTOUT B
DL254-4	5 - 15/16"	3 - 5/8"	1 - 1/4"	4"
DL254-6	8 - 5/16"	4 - 3/8"	1 - 1/4"	6-3/16"
DL254-8	10 - 5/16"	4 - 7/8"	1 - 1/4"	8"

IP54

PF 0.9

30W 30W 30W  
Adjustable power

WW CW DL  
Color changeable

HOURS  
50000