




B

APPLICATION

This Lovely Architectural Linear capable of fulfilling designer thoughts with no limits. Suitable for Hotels, Offices , Restaurants. Shopping Malls, Industrial.



PDM




UGR<19

SPECIFICATION FEATURES

Design	Aluminum body with Diffused Lens deliver a low glare UGR <19.
Mounting	Available in Suspended, Ceiling , Wall and Recessed (Trim and Trim-less) versions. Linkable for Continuous Runs.
LED	Standard 31/46/61 watt SMD 2835 with 100lm/W , CRI 80/90. Available In Standard 3000K, 4000K or 6000K CCT. Customize Power and CCT option available.
LED Driver	UL Class P Certified Power Supply 0-10 V, PWM and resistor dimming solution Emergency Power Supply and Sensor Options are available.



PHOTOMETRY

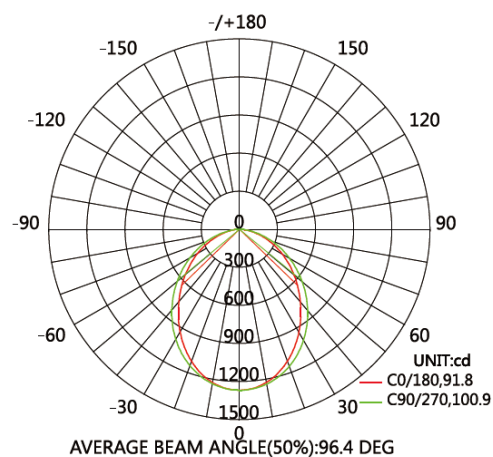

TABULATION & ORDERING NUMBER LOGIC

Model	CCT	Watt	Length	Finish	Optics	Dimming	CCT & CRI	B
L5570	WW - 3000K	31 - 31W	12 - 4'	W - White	PDM – Planner diffusion mask	SDC - Constant current version 3 in 1 Dimming (0-10V, PWM, Resistance)	30K8 - 3000K RA 80	
	NW - 4000K	46 - 46W	18 - 6'	B - Black			40K8 - 4000K RA 80	
	W - 6000K	61 - 61W	25 - 8'	S - Silver	UGR – Anti Glare		60K8 - 6000K RA 80	
	Note *	Note **					30K9 - 3000K RA 90	
							40K9 - 4000K RA 90	
							60K9 - 6000K RA 90	

Note*: Above are the standard CCT, Other CCT are available as per Project requirement.

Note:** Above are the standard Watts, Power/ Lumen Package can be customize as per Project requirement






ORDERING EXAMPLE: L5570-WW-31-12-W-PDM-SDC-OK8-A-L-SM

Quick Model Reference:

4' : L5570-a31S

6' : L5570-a46S

8' : L5570-a61S

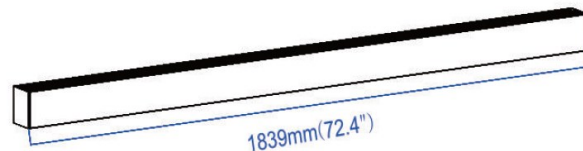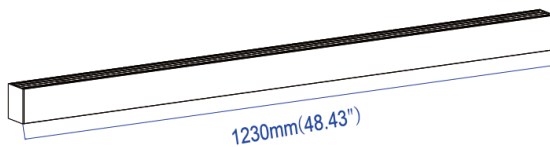

Voltage	Accessories
A - 100 - 277 VAC	L-PTB-NPF - pendant wire + canopy without cable hole.
	L-PTB-NF - pendant wire + canopy with cable hole.
	L-SM - Screw for Ceiling Mounted
	L457-MW - Wall Mounted Clip
	L45-180 - Joiner Set
	L-CH - Dimmable male and female quick connect wire
	EM- UL Listed Emergency Battery Pack Duration 1.5 Hrs