
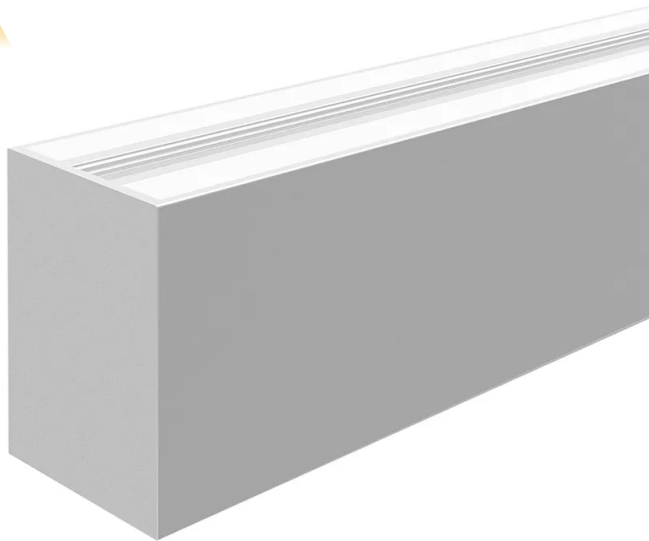


B

APPLICATION

This Lovely Architectural Linear capable of fulfilling designer thoughts with no limits. Suitable for Hotels, Offices , Restaurants. Shopping Malls, Industrial.



RAL9006
Silver


RAL9004
Black

RAL9003
White



SPECIFICATION FEATURES

Design	Aluminum body with Diffused Lens deliver a low glare UGR <19 optional.
Mounting	Available in Suspended and Wall versions, Linkable.
LED	44,67 and 89 watt (11W/Ft) with UP (4.5W/Ft) and Down (6.7W/Ft) @ 100lm/W , CRI 80/90. Available in 3000K, 3500K, 4000K or 6000K CCT.
LED Driver	UL Class P Certified Power Supply 0-10 V, PWM and resistor dimming solution Emergency Power Supply and Sensor Options are available.


PHOTOMETRY



PDM



UGR<19



TABULATION & ORDERING NUMBER LOGIC

Model	CCT	Watt	Length	Finish	Optics	Dimming	CCT & CRI	B
L5580D	WW - 3500K	44 - 44W	12 - 4'	W - White	PDM – Planner diffusion mask UGR – Anti Glare	SDC - Constant current version 3 in 1 Dimming (0-10V, PWM, Resistance)	35K8 - 3500K RA 80	
	NW - 4000K	67 - 67W	18 - 6'	B - Black			40K8 - 4000K RA 80	
	W - 6000K	89 - 89W	25 - 8'	S - Silver			60K8 - 6000K RA 80	
	Note *	Note **					30K9 - 3000K RA 90	
							40K9 - 4000K RA 90	
							60K9 - 6000K RA 90	

Note*: Above are the standard CCT, Other CCT are available as per Project requirement.

Note:** Above are the standard Watts, Power/ Lumen Package can be customize as per Project requirement

ORDERING EXAMPLE: L5580D-WW-89-25-WW-PDM-SDC-30K8-A..

Quick Model Reference:

4' : L5580D-a44S

6' : L5580D-a67S

8' : L5580D-a89S

Voltage	Accessories
A - 100 - 277 VAC	L-PTB-NPF - pendant wire + canopy without cable hole.
	L-PTB-NF - pendant wire + canopy with cable hole.
	L457-MW - Wall Mounted Clip
	L45-180 - Joiner Set
	L-CH - Dimmable male and female quick connect wire

